



K-22 Features

- pulse-jet engine without movable parts allows unlimited operation.
- 9 litres solution tank, easily detachable, made of heavy duty polyethylene, transparent with litre scale.
- Double stainless steel-cooling jacket/diffuser with front cooling air intake, additional sound absorption and effective heat control.
- pulsFOG fingertip quick-start-system through patented direct fuel injection and automatic ignition.
- For safety-reasons: non-pressurized fuel tank.
- Most metal parts made of stainless steel.
- Manual fog control valve combined with automatic cut-off device (optional).
- Simple and straightforward design enables the user to carry out repair work himself.

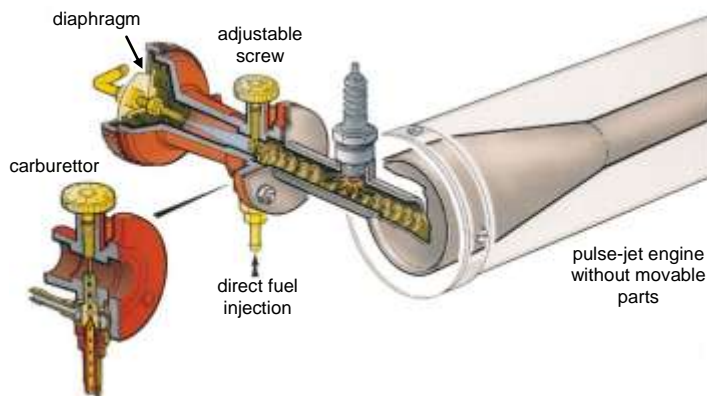

Automatic cut-off device (optional):

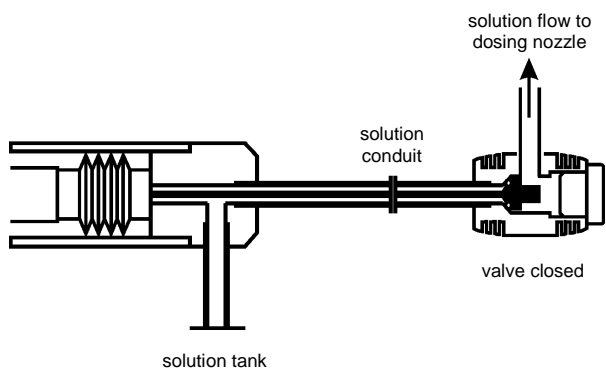

Finger-tip-start by a simple finger press

- Open adjustable screw on carburettor.
- Push down the primer for immediate fuel injection and engine start.



a)

b)

Standard accessories:

Fuel pitcher, solution funnel, spare parts bag with membranes and sealing rings, cleaning brush and ear protectors

Optional accessories:

Air agitator, automatic cut-off device, dosing nozzles of different sizes, protective suit, respiratory mask with filter A₂ B₂-P₃



Subject to technical changes 10/2011



pulsFOG Dr. Stahl & Sohn GmbH

Abigstraße 8 • D-88662 Überlingen • Tel. (0) 7551 / 9261-0 • Fax (0) 7551 / 926161
E-Mail: info@pulsfog.com • Internet: http://www.pulsfog.com